

- ✦ Rechargeable fans available with or without remote control
- ✦ AC/DC Function
- ✦ 2 X 6V4.5Ah Rechargeable Lead-acid Battery
- ✦ 4pcs Bright LED Light with DC 12V Input and USB 5V output
- ✦ 0.5H Timer Function with overcharge and over discharge protection function
- ✦ With charge and working indicator

**RFDL 5996**

**RFDL 5998**

**RFDL 5968**

**RFDL 5966**


MODEL	BLADE	PCS/CTN	CHARGING TIME	DURATION	MEASUREMENT	40HQ
RFDL5996	16"	2	12-15 Hrs	2hrs-high, 5hrs-medium, 10hrs-low-75hrs-LED	47.5*34.5*57.5cm	1443
RFDL5966	16"	3	12-15 Hrs	2hrs-high, 5hrs-medium, 11hrs-low-60hrs-LED	66*48.6*58cm	1096
RFDL5998	18"	2	12-15 Hrs	2hrs-high, 5hrs-medium, 10hrs-low-75hrs-LED	80.5*34.5*70.5cm	694
RFDL5968	18"	3	12-15 Hrs	2hrs-high, 5hrs-medium, 9.5hrs-low-60hrs-LED	66*48.5*67cm	953


**RFDL 2936**


- ✦ 6V 7AH Rechargeable Battery
- ✦ 2 - Speed Selection
- ✦ 20 Pcs Bright LED Light
- ✦ AC /DC Operated

MODEL	BLADE	PCS / CTN	MEASUREMENT	40 HQ CONTAINER (PCS)
RFDL2936	14"	2	50*39*63.5 cm	1180

## Technical details for 16" Wall/Pedestal Fans

- ✓ Motor - 100% copper winding
- ✓ Speed - 1300 RPM @ 230 V
- ✓ Control - 3 speed switch
- ✓ Packing - Thermocol safe strong box
- ✓ Guard - 120 spoke powder coated
- ✓ Cord wire - Heavy quality pin & above 2 mtr length

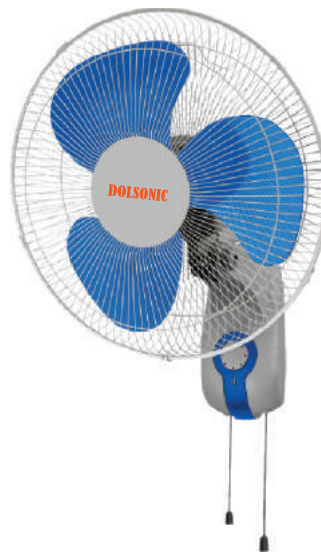

## Technical details for 18" Wall/Pedestal Fans

- ✓ 28mm stack height motor.
- ✓ 100% copper winding.
- ✓ 3 Leaf Aluminium Blades.
- ✓ MS base power coated.
- ✓ Aluminium Gear box.
- ✓ Aluminium U holder and aluminium Pivot.
- ✓ 120 ribs Power coated Guards.
- ✓ RPM 1300 at 230v full load.



\*16"/18"wall/pedestal high speed fans available